



葉興機械股份有限公司

YESSING MACHINERY CO., LTD.

www.yessing-machine.com.tw

E-mail:yessing@yessing.com.tw

No.21-5,Lane231,Gaomei Rd., Qingshuei District,
Taichung City 43646Taiwan

43646台中市清水區高美路231巷21-5號


TEL:886-4-26265299 FAX:886-4-26268991

最新科技
Advanced Technology


環保/無毒/透濕透氣 完全符合歐盟與美國最新環保規範
Environment protection/Non-toxic/Breathability/Achieve EU and USA regulation



間距數位顯示
Gaps Digital Display

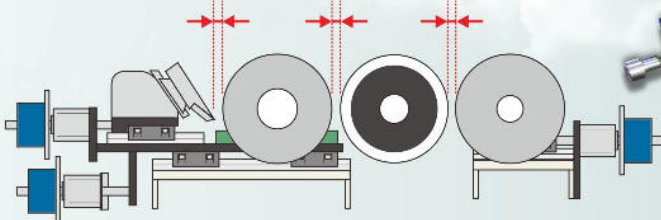

三處間距設定 Gaps Setting of three areas.

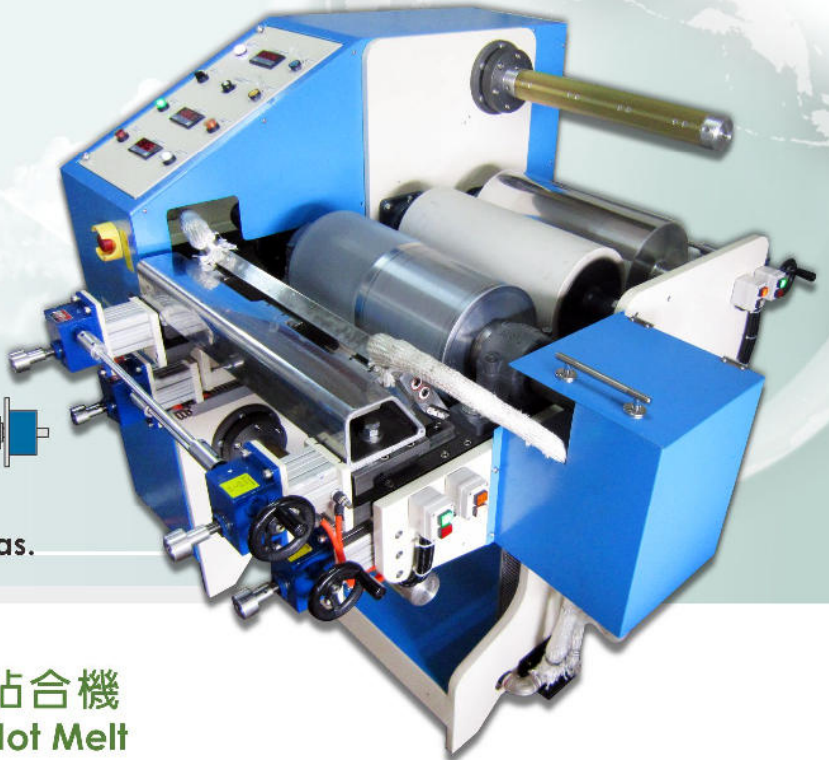

PUR-500

環保小型溼氣反應型熱熔膠貼合機
Eco Mini Polyurethane Reactive Hot Melt
Adhesive Laminating Machine

We can make its size and working width according to clients' demands. |||||

可依客戶需求量身訂做尺寸及作業寬度 |||||

[作業寬度] Working Width

■ 500mm

[加熱裝置] Heat Device

■ 熱媒式 Heat Coal Oil

[電壓] Voltage

■ 依客戶需求配電
Designed according to
clients' demands

[機台優點] Advantages

1. 人機控制介面 / 上膠寬度、厚薄精密調整，節省膠量。
Human Machine Interface/The gluing width and thickness can be precisely adjusted to save glue amounts.
2. 高科技奈米環保 / 無溶劑貼合製程 / 不含八大金屬 / 通過SGS瑞士檢驗測試
High Tech Nano Eco-protection Lamination / Lamination without liquor / Excluding 8 heavy metals / Pass SGS Switzerland Inspection Test


[貼合機週邊設備] Equipment for Laminating Machine

● 高精密熱風循環烘箱
Highly Accurate Circulating Oven

適合打樣或少量生產用
Suitable for making samples or
few amounts of production

使用容量
Capacity
2Kg Adhesive x 5 Packages

使用溫度
Temperature 0-200°C



● 熱媒加熱循環系統
Heat Coal Oil Circulating System

泵馬力
Pump Power 3HP

加熱能量
Heating Capacity 12KW

使用溫度
Temperature 40-180°C

電源Power
依客戶需求配電

Designed according to clients' demand

