



葉興機械股份有限公司

YESSING MACHINERY CO., LTD.

www.yessing-machine.com.tw

E-mail:yessing@yessing.com.tw


No.21-5,Lane231,Gaomei Rd., Qingshuei District, Taichung City 43646Taiwan

43646台中市清水區高美路231巷21-5號

TEL:886-4-26265299 FAX:886-4-26268991

最新科技
Advanced Technology

環保/無毒/透濕透氣 完全符合歐盟與美國最新環保規範
Environment protection/Non-toxic/Breathability/Achieve EU and USA regulation

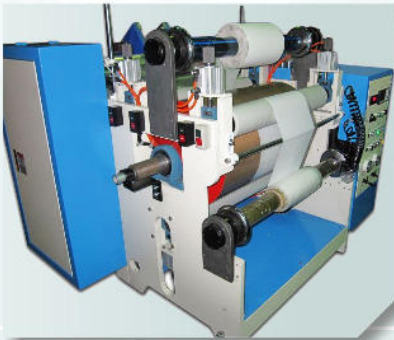

PUR-700 (電熱輪裝置) 環保小型溼氣反應型熱熔膠貼合機 ECO Mini Polyurethane Reactive Hot Melt Adhesive Laminating Machine(Heating Roller)

[機械尺寸] Machine Size (Approx.)

■ 約L 1300 x W 2000 x H 1300 mm

[電壓] Voltage

■ 依客戶需求配電 Designed according to clients' demands

[標準作業寬度]

Standard Working Width

■ 700 mm

[加熱裝置] Heat Device

■ 塗佈輪:熱媒式 Coating Roller:Heated by Hot Coal Oil
貼合輪:電熱式 Laminating Roller:Heated by Electrical Heat

[機台優點] Advantages

1. 上膠寬度、厚薄精密調整，節省膠量
The glue width and thickness can be precisely adjusted to save glue amounts.
2. 高科技奈米環保無溶劑貼合製程
High Tech Nano Eco-protection Lamination without the solvent.
3. 根據不同的布種，自動調整材料收放料的鬆緊度及公斤數
Based on different fabrics, the tension of material unwinding and rewinding can be automatically adjusted.
4. 後段貼合輪加溫系統亦可適用於冷膠打樣加溫熱成用
The heating system of laminating roller applies to making samples with Cold Glue and drying by heat


[貼合機週邊設備] Equipment for Laminating Machine

● 高精密熱風循環烘箱
Highly Accurate Circulating Oven

適合打樣或少量生產用
Suitable for making samples or few amounts of production

使用容量
Capacity
2Kg Adhesive x 5 Packages

使用溫度
Temperature 0-200°C




● 熱媒加熱循環系統
Heat Coal Oil circulating System

泵馬力
Pump Power 3HP

加熱能量
Heating Capacity 12KW

使用溫度
Temperature 40-180°C

電源Power
依客戶需求配電
Designed according to clients' demand



We can make its size and working width according to clients' demands. |||

可依客戶需求量身訂做尺寸及作業寬度 |||