


最新科技
Advanced Technology

環保/無毒/透濕透氣 完全符合歐盟與美國最新環保規範
Environment protection/non toxic/breathability achieve EU/USA regulation

PUR-RB 溼氣反應型熱熔膠地磚貼合機

Polyurethane Reactive Hot Met Adhesive Rubber Board Laminating Machine

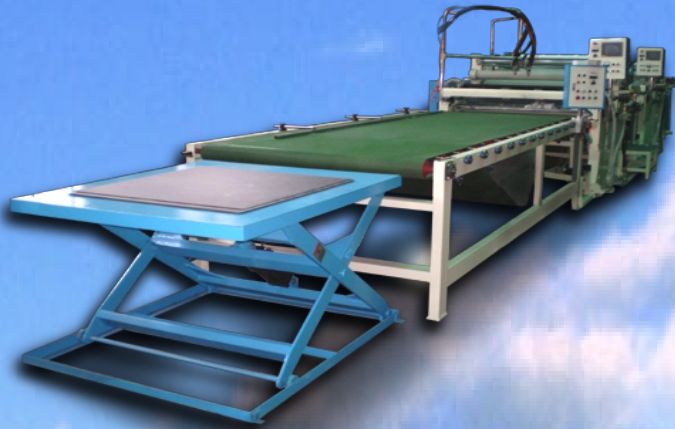

| | |
|------------------------------|------------------------------------------------|
| 機械尺寸 Machine size | L 16400 x W 2200 x H 2400 mm |
| 使用寬度 Working width | 1905mm (75") |
| 主機控制 Host control | 伺服馬達 PLC 系統 Servo PLC system |
| 加熱裝置 Heat device | 熱媒式 Hot coal |
| 電 壓 Voltage | 依客戶需求配電 According to client s demand |



人機控制介面 / 上膠寬度、厚薄精密調整，節省膠量

Computer monitor controller/glue width.thickness precise adjustment,save glue/

高科技奈米環保 / 無溶劑貼合製程 / 不含八大金屬 / 通過SGS瑞士檢驗測試

High tech nano environment protection laminating/No liquor laminating /Without 8 heavy metal/Pass SGS switzerland inspection test

貼合機周邊設備 Laminating Machine Peripherals

● 附三種上膠輪 **Additional three kinds of gluing wheel**



鑽石紋 **Diamond-shaped vein**




點狀紋 **Dot vein**



魚鱗紋 **Fish scaling vein**

● 貼合機配電箱 **Power distribution unit of laminating machine**

依客戶需求配電 **According to client's demand**



● 高精密熱風循環烘箱 **Highly Accurate Circulating Oven**

2kg膠 x 5


適合打樣或少量生產用

使用溫度 0~200°C


2kg adhesive * 5

Suitable for make samples or few scale production

Temperature : 0~200°C



● 熱媒加熱循環系統 **Heating circulator with coal oil**



● **PUR** 桶式真空熱熔膠機 **Vacuum tub hot melt adhesive coating system**

15kg~50kg液態膠

量產用

使用溫度 0~220°C


雙管、雙噴頭組

15kg~50kg Liquid adhesive

Large scale production

Temperature : 0~220°C

Doble tub and Sprinkle-Nozzle



葉興機械股份有限公司 **YESSING MACHINERY CO.,LTD**

Http:www.pur-laminating.com E-mail:yessing-sales@yessing.com.tw TEL : 886-4-26265299 FAX : 886-4-26268991

台中縣清水鎮高美路231巷21之5號 No.21-5,Lane231,Gaomei Rd.,Chingshuei Township,Taichung County 43646Taiwan