

最新科技
Advanced Technology

環保/無毒/透濕透氣 完全符合歐盟與美國最新環保規範
Environment protection/non toxic/breathability achieve EU/USA regulation


HM-300

熱熔膠 - 迷你型貼合機 Hot Melt Adhesive - Mini Laminating Machine

作業寬度 300mm
Working width
主機控制 伺服馬達 PLC系統
Host control Servo PLC system
加熱裝置 熱媒式
Heat device Hot coal
電 壓 依客戶需求配電
Voltage According to client's demand

此為基本型規格，可依客戶需求量身訂做尺寸及作業寬度
This type of specifications for fundamental,
We can be according to client demand size
and working width to make

小體積、省料、省空間
Small Volume, Saving Materials, Saving Space
適合少量試貼
Apply to a little quantity of laminating test

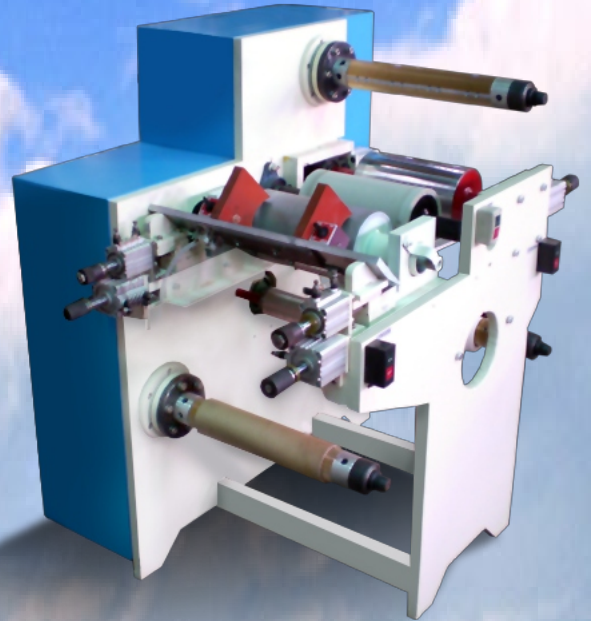


人機控制介面 / 上膠寬度、厚薄精密調整，節省膠量
Computer monitor controller / glue width, thickness precise adjustment, save glue /
高科技奈米環保 / 無溶劑貼合製程 / 不含八大金屬 / 通過SGS瑞士檢驗測試
High tech nano environment protection laminating / No liquor laminating
/ Without 8 heavy metal / Pass SGS switzerland inspection test

貼合機週邊設備 Laminating Machine Peripherals


● 高精密熱風循環烘箱 Highly Accurate Circulating Oven

使用容量 CAPACITY 2KG 膠 ADHESIVE x 5
適合打樣或少量生產用 SUITABLE FOR MAKE SAMPLES OR FEW SCALE PRODUCTION
使用溫度 TEMPERATURE 0~200°C




● 熱媒加熱循環系統 Heating circulator with coal oil

泵馬力 PUMP POWER 1HP
加熱能量 HEATING CAPACITY 9KW
使用溫度 TEMPERATURE 0~100°C
電源 POWER 220V 60HZ



● PUR 桶式真空熱熔膠機 Vacuum tub hot melt adhesive coating system

15kg~50kg 液態膠 15kg~50kg Liquid adhesive
量產用 Large scale production
使用溫度 0~220°C Temperature: 0~220°C
雙管、雙噴頭組 Doble tub and Sprinkle-Nozzle

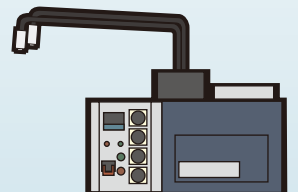

葉興機械股份有限公司 YESSING MACHINERY CO., LTD

Http:www.pur-laminating.com E-mail:yessing-sales@yessing.com.tw TEL: 886-4-26265299 FAX: 886-4-26268991
台中縣清水鎮高美路231巷21之5號 No.21-5, Lane231, Gaomei Rd., Chingshuei Township, Taichung County 43646 Taiwan